


MINIATURE SINGLE ROW BALL BEARINGS (SEALED - FLANGED) INCH SERIES

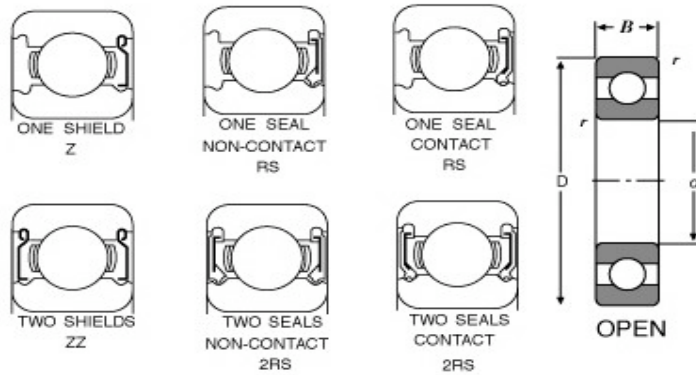

*In addition to Teflon seals, these sizes are available in Perbunan rubber seals (however the RPM will be slowed.)

RADIAL SEALED FLANGED BEARINGS INCH SERIES					LOAD RATINGS (Lbs.)		
BEARING NUMBER	GRW P/N	BORE d	OUTER DIAMETER D	WIDTH B	DYN C _r	STATIC C _{or}	RPM
FR1-4-2RS	F5/64-2TS	.0781	.296	.1406	286	90	65,000
FR1-5-2RS	F3/32-2TS	.0937	.359	.1406	644	215	51,000
FR144-2RS	F3175-2TS	.1250	.296	.1094	292	97	53,000
FR2-5-2RS	F1/8A-2TS	.1250	.359	.1406	644	215	51,000
FR2-6-2RS	F1/8A/6-2TS	.1250	.422	.1406	644	215	51,000
FR2-2RS	F1/8B-2TS	.1250	.440	.1562	720	260	44,000
FR155-2RS	F3697-2TS	.1562	.359	.1250	391	165	42,000
FR156-2RS	F4763A-2TS	.1875	.359	.1250	391	165	42,000
FR166-2RS	F4763B-2TS	.1875	.422	.1250	730	271	41,000
FR3-2RS	F3/16-2TS*	.1875	.565	.1960	1,339	488	37,000
	F1/4A/0001-2TS	.1875	.690	.1960	1,651	670	31,000
FR168-2RS	F6350A-2TS	.2500	.422	.1250	391	165	35,000
FR188-2RS	F6350B-2TS	.2500	.547	.1875	730	271	33,000
FR4-2RS	F1/4A-2TS	.2500	.690	.1960	1,651	670	31,000
FR1810-2RS	F7938-2TS	.3125	.547	.1562	539	279	30,000
FR6-2RS	F3/8-2TS	.3750	.969	.2812	2,555	1,129	24,000
FR8-2RS	F1/2-2TS	.5000	1.225	.3125	4,120	2,010	21,000