


MINIATURE SINGLE ROW BALL BEARINGS (SEALED) INCH SERIES

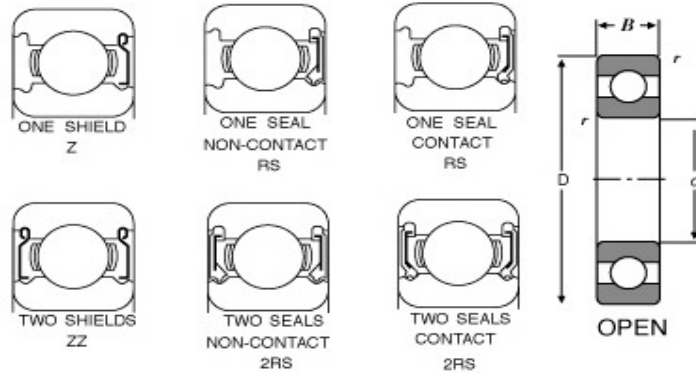

*In addition to Teflon seals, these sizes are available in Perbunan rubber seals (however the RPM will be slowed.)

RADIAL SEALED BEARINGS INCH SERIES					LOAD RATINGS (Lbs.)		
BEARING NUMBER	GRW P/N	BORE d	OUTER DIAMETER D	WIDTH B	DYN C _r	STATIC C _{or}	RPM
R1-4-2RS	5/64-2TS	.0781	.2500	.1406	286	90	65,000
R1-5-2RS	3/32-2TS	.0937	.3125	.1406	644	215	51,000
R144-2RS	3175-2TS	.1250	.2500	.1094	292	97	53,000
R2-5-2RS	1/8A-2TS	.1250	.3125	.1406	644	215	51,000
R2-6-2RS	1/8A/6-2TS	.1250	.3750	.1406	644	215	51,000
R2-2RS	1/8B-2TS	.1250	.3750	.1562	720	260	44,000
R155-2RS	3697-2TS	.1562	.3125	.1250	391	165	42,000
R156-2RS	4763A-2TS	.1875	.3125	.1250	391	165	42,000
R166-2RS	4763B-2TS	.1875	.3750	.1250	730	271	41,000
R3-2RS	3/16-2TS*	.1875	.5000	.1960	1,339	488	37,000
	1/4A/0001-2TS	.1875	.6250	.1960	1,651	670	31,000
R168-2RS	6350A-2TS	.2500	.3750	.1250	391	165	35,000
R188-2RS	6350B-2TS	.2500	.5000	.1875	730	271	33,000
R4-2RS	1/4A-2TS*	.2500	.6250	.1960	1,651	670	31,000
R4A-2RS	1/4-2TS*	.2500	.7500	.2812	2,522	1,057	28,000
R1810-2RS	7938-2TS	.3125	.5000	.1562	539	279	30,000
R6-2RS	3/8-2TS*	.3750	.8750	.2812	2,555	1,129	24,000
R8-2RS	1/2-2TS	.5000	1.125	.3125	4,120	2,010	21,000