


MINIATURE SINGLE ROW BALL BEARINGS (OPEN - FLANGED) METRIC SERIES

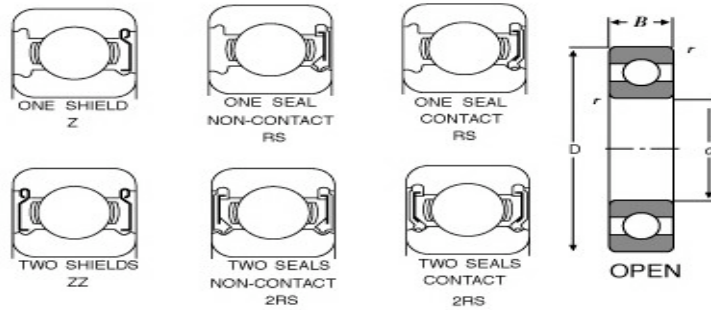

RADIAL OPEN FLANGED BALL BEARINGS – METRIC SERIES					LOAD RATINGS (Lbs.)		
STD. BEARING NUMBER	GRW P/N	BORE d mm	OUTER DIAMETER D mm	WIDTH B mm	DYN C _r	STATIC C _{or}	RPM
F618/1.5	F68/1.5	1.5	5	1.2	163	44	113,000
F619/1.5	F69/1.5	1.5	6.5	2	192	59	93,000
F618/2	F682	1.5	6.1	1.5	192	59	90,000
F619/2	F692	2	7.5	2.3	286	90	91,000
F618/2.5	F68/2.5	2	7.1	1.8	289	92	81,000
F619/2.5	F69/2.5	2.5	8.5	3.5	432	149	71,000
F673	F673	3	7.2	2	195	60	81,000
F618/3	F683	2.5	8.1	2	432	149	71,000
F619/3	F693	3	9.5	3	644	215	67,000
F623	F623	3	11.5	4	725	265	62,000
F617/4	F674	4	8.2	2	345	130	63,000
F618/4	F684	4	10.3	2.5	658	226	62,000
F619/4	F694	4	12.5	4	730	271	66,000
F604	F604	4	13.5	4	734	282	56,000
F624	F624	4	15	5	1,339	488	52,000
F634	F634	4	18	5	1,646	663	39,000
F617/5	F675	5	9.2	2	390	160	52,000
F638/5	F685	5	12.5	3	734	282	52,000
F619/5	F695	5	15	4	851	366	49,000
F605	F605	5	16	5	1,096	437	50,000
F625	F625	5	18	5	1,646	663	40,000
F635	F635	5	22	6	2,522	1,057	33,000
F628/6	F686	6	15	3.5	1,096	437	44,000
F619/6	F696	6	17	5	1,186	505	46,000
F626	F626	6	22	6	2,522	1,057	34,000
F628/7	F687	7	16	3.5	1,186	505	41,000
F619/7	F697	7	19	5	1,795	776	39,000
F607	F607	7	22	6	2,522	1,057	38,000
F627	F627	7	25	7	3,369	1,363	35,000

F618/8	F688	8	18	4	1,795	776	38,000
F619/8	F698	8	22	6	1,798	797	40,000
F608	F608	8	25	7	3,369	1,363	38,000
F618/9	F689	9	19	4	1,798	797	34,000
F61800	F6800	10	21	5	1,922	915	34,000